

# HHTTP-65T-F-V2



10-port small cell antenna, 4x 1695-2200, 4x 2496-2690 and 2x 5150-5925 MHz, 65° Horizontal Beamwidth, fixed tilt. Pigtail cables with Nex10 connector (male) for Port 1~8 and 4.3/10.0 male for Port 9, 10.

- FCC U-NII1 Compliant for gain and upper sidelobe suppression
- Designed for inside-the-shroud deployments such as DOITT-approved structures
- Supports AWS/PCS, BRS and LAA bands

## General Specifications

<b>Antenna Type</b>	Small Cell
<b>Band</b>	Multiband
<b>Color</b>	White
<b>Performance Note</b>	Outdoor usage
<b>Radome Material</b>	ASA, UV resistant
<b>Radiator Material</b>	Low loss circuit board
<b>Reflector Material</b>	Aluminum
<b>RF Connector Interface</b>	4.3-10 Male   NEX10 Male
<b>RF Connector Location</b>	End of flexible lead
<b>RF Connector Quantity, high band</b>	2
<b>RF Connector Quantity, mid band</b>	8
<b>RF Connector Quantity, total</b>	10

## Dimensions


<b>Width</b>	127 mm   5 in
<b>Depth</b>	36 mm   1.417 in
<b>Length</b>	470 mm   18.504 in
<b>Net Weight, with mounting kit</b>	1.7 kg   3.748 lb

## 5 GHz Port Power Table

# HHTTP-65T-F-V2

5 GHz FCC Power Requirements				
U-NII Band	U-NII 1	U-NII 2A	U-NII 2C	U-NII 3
Frequency (MHz)	5150 - 5250	5250 - 5350	5470 - 5725	5725 - 5850
Max Input power per port to align with FCC Title 47 Part 15 (Watts)	0.5	0.125	0.125	0.5

## Array Layout

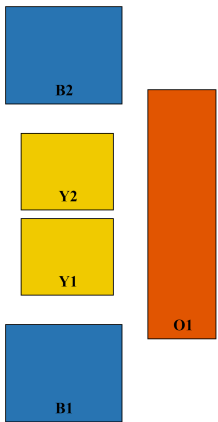


Array ID	Frequency (MHz)	RF Connector	HPBW	RET (N/A)	AISG No.	AISG RET UID
B1	1695-2200	1 - 2	65°	N/A	NA	N/A
B2	1695-2200	3 - 4	65°			
Y1	2496-2690	5 - 6	65°			
Y2	2496-2690	7 - 8	65°			
O1	5150-5925	9 - 10	65°			

(Sizes of colored boxes are not true depictions of array sizes)

## Port Configuration

# HHTTP-65T-F-V2

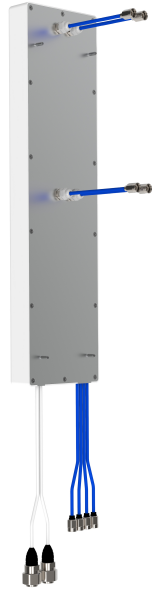

## Electrical Specifications

<b>Impedance</b>	50 ohm
<b>Operating Frequency Band</b>	1695 – 2200 MHz   2496 – 2690 MHz   5150 – 5925 MHz
<b>Polarization</b>	±45°
<b>Total Input Power, maximum</b>	400 W

## Electrical Specifications

<b>Frequency Band, MHz</b>	<b>1695–1920</b>	<b>1920–2200</b>	<b>2496–2690</b>	<b>5150–5925</b>
<b>Gain, dBi</b>	8.2	8.2	8	3.2
<b>Beamwidth, Horizontal, degrees</b>	72	72	72	71
<b>Beamwidth, Vertical, degrees</b>	74	75	64	21
<b>Beam Tilt, degrees</b>	0	0	0	0
<b>Front-to-Back Ratio, Copolarization 180° ± 30°, dB</b>	27	26	26	21
<b>Isolation, Cross Polarization, dB</b>	20	20	20	20
<b>Isolation, Inter-band, dB</b>	20	20	20	20
<b>VSWR   Return loss, dB</b>	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0
<b>PIM, 3rd Order, 2 x 20 W, dBc</b>	-150	-150	-150	
<b>Input Power per Port, maximum,</b>	50	50	50	5

# HHTTP-65T-F-V2

watts

## Electrical Specifications, BASTA

Frequency Band, MHz	1695–1920	1920–2200	2496–2690	5150–5925
Gain by all Beam Tilts, average, dBi	7.9	7.9	7.6	2.7
Gain by all Beam Tilts Tolerance, dB	±0.5	±0.6	±0.7	±0.9
Beamwidth, Horizontal Tolerance, degrees	±3.9	±3.5	±7.4	±3.3
Beamwidth, Vertical Tolerance, degrees	±9.3	±12	±7.1	±1.6
CPR at Boresight, dB	23	21	20	14

## Mechanical Specifications

Wind Loading @ Velocity, frontal	67.0 N @ 150 km/h (15.1 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	83.0 N @ 150 km/h (18.7 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	18.0 N @ 150 km/h (4.0 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

## Packaging and Weights

Width, packed	195 mm   7.677 in
Depth, packed	140 mm   5.512 in
Length, packed	575 mm   22.638 in
Weight, gross	2.4 kg   5.291 lb

## Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system



### \* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
------------------	---